

A2XR (Reactive Attenuator/Load)



Overview


- Continuous control of Resonance, Loudness and Presence
- Based on 4x12 cab (G12M) impedance curve
- Choose 2Ω, 4Ω, 8Ω, or 16Ω version
- Speaker impedance equal to or higher
- Power handling 200W
- True Load with 3 additional reference points 1 Hz, 1kHz and 10 kHz

Features

- Impedance curve matched to selected impedance
- Full reactivity at all levels
- Transformer balanced line out with volume control
- Hi mode for easier live setting Max attenuation: -22db
- Lo mode for bedroom levels Max attenuation: -66db
- Big Feet to fit on top of amp

Safety

- Automatic load mode (disconnect speaker cable)

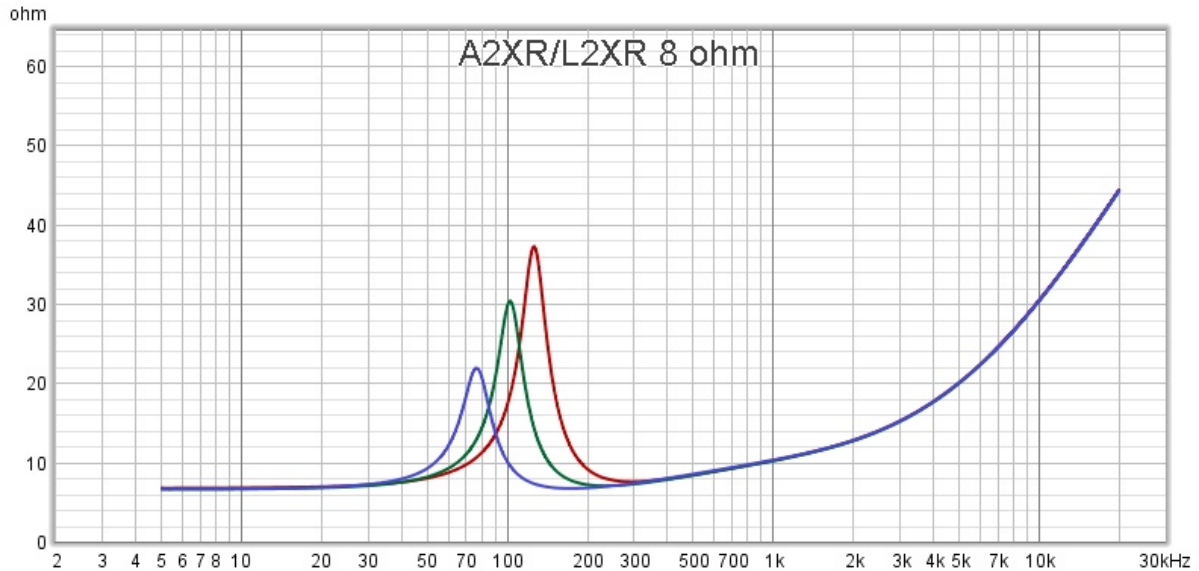

Picture shows impedance with optional 3-way resonance switch

Red: Standard

Green: Low

Blue: Sub

*All units produced after 1st of November 2021 contains "True Load"

Specifications

IMPEDANCE	LINE OUT	CONTROLS	POWER HANDLING
2Ω, 4Ω, 8Ω, or 16Ω	100Ω BAL	RHEOSTAT	150W - 200W

WIDHT	DEPTH	HEIGHT	WEIGHT
10 in	8 in	5,866 in	10 lbs

2 year limited warranty. Warranty applies to defective material and workmanship for the original purchaser when bought from MASTERPLANT or authorised dealer. Opening the unit will void the limited warranty and any required service or update must be performed by MASTERPLANT. A copy of the original receipt must be included with the unit. Warranty will not cover damage caused by misuse or accidents. It will not cover any damage inflicted to other equipment resulting from impedance mismatch or any other faulty use.