


ATTENUATOR IIX (Reactive Load/Attenuator)

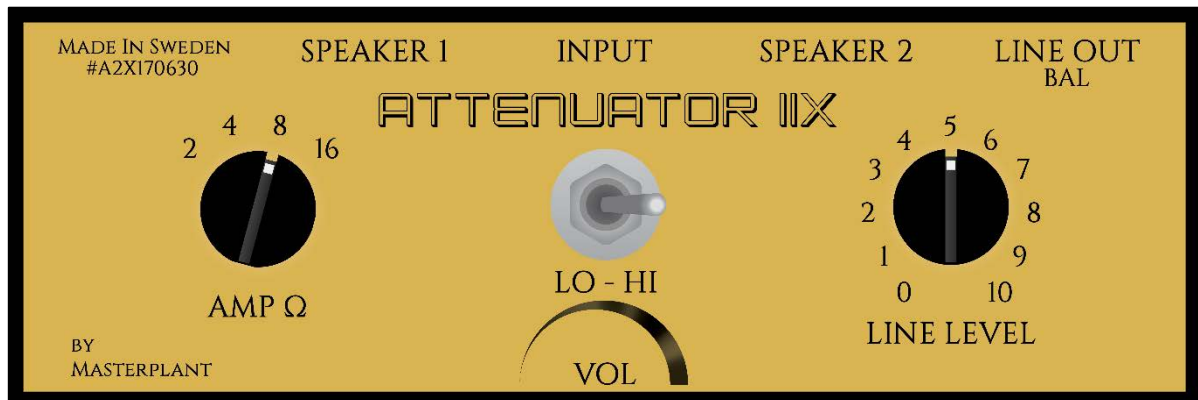

Overview

- Single step less volume control
- Based on 4x12 cab (G12M) impedance curve
- Supports 2Ω-4Ω-8Ω-16Ω amplifiers
- Speaker impedance equal to or higher than impedance selector

Benefits

- Impedance curve matched to impedance selector
- Full reactivity at all levels
- Transformer balanced line out

Safety

- Automatic load mode (disconnect speaker cable)

Specifications

IMPEDANCE	SPEAKER	LINE OUT	CONTROLS	POWER HANDLING
2Ω-16Ω	2Ω-16Ω	100Ω BAL	RHEOSTAT	100W

2 year limited warranty. Warranty applies to defective material and workmanship for the original purchaser when bought from MASTERPLANT or authorised dealer. Opening the unit will void the limited warranty and any required service or update must be performed by MASTERPLANT. A copy of the original receipt must be included with the unit. Warranty will not cover damage caused by misuse or accidents. It will not cover any damage inflicted to other equipment resulting from impedance mismatching or any other faulty use.