

miniATT^{XR} (Reactive Attenuator/Load)



Overview


- Continuous control of Resonance, Loudness and Presence
- Based on 4x12 cab (G12M) impedance curve (Custom order open back curve)
- Choose 2Ω, 4Ω, 8Ω, or 16Ω version
- Speaker impedance equal to or higher
- Power handling 50W
- Passive Circuit

Features

- Full reactivity at all levels
- Compact, fits on the side of common 15W-50W amplifiers
- Impedance curve matched to selected impedance
- Max attenuation: -66db
- Line Out Transformer Balanced

Safety

- Automatic load mode (disconnect speaker cable)

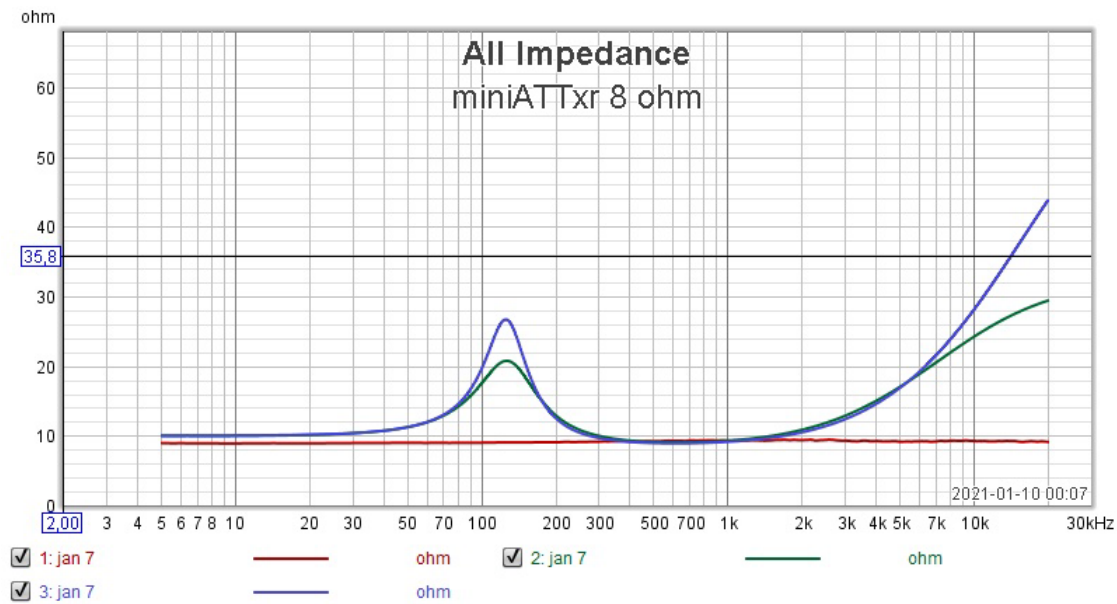

Resonance & Presence

1: Minimum

2: Medium

3: Maximum

Specifications

IMPEDANCE	LINE OUT	CONTROLS	POWER HANDLING
2Ω-4Ω-8Ω-16Ω	500Ω	RHEOSTAT	50W

WIDHT	DEPTH	HEIGHT	WEIGHT
6.5 in	5.5 in	2.5 in	2.2 lbs

2 year limited warranty. Warranty applies to defective material and workmanship for the original purchaser when bought from MASTERPLANT or authorised dealer. Opening the unit will void the limited warranty and any required service or update must be performed by MASTERPLANT. A copy of the original receipt must be included with the unit. Warranty will not cover damage caused by misuse or accidents. It will not cover any damage inflicted to other equipment resulting from impedance mismatch or any other faulty use.